


JIC male has 37° flare which seals against 37° seat in female. JIC male can also seal against 37° flared tubing with JIC nut and sleeve.

JIC male can also be used with RYCO S134 J-Lok Female Nut and Flareless Olive on Imperial OD tubing.

UNO (O Ring Boss) seals with O Ring compressed between hex boss of UN male and 12°/15° tapered bore of UN (O Ring Boss) female port. For elbows and tees, Backup Washer and Lock Nut allow orientation of fitting to required direction.

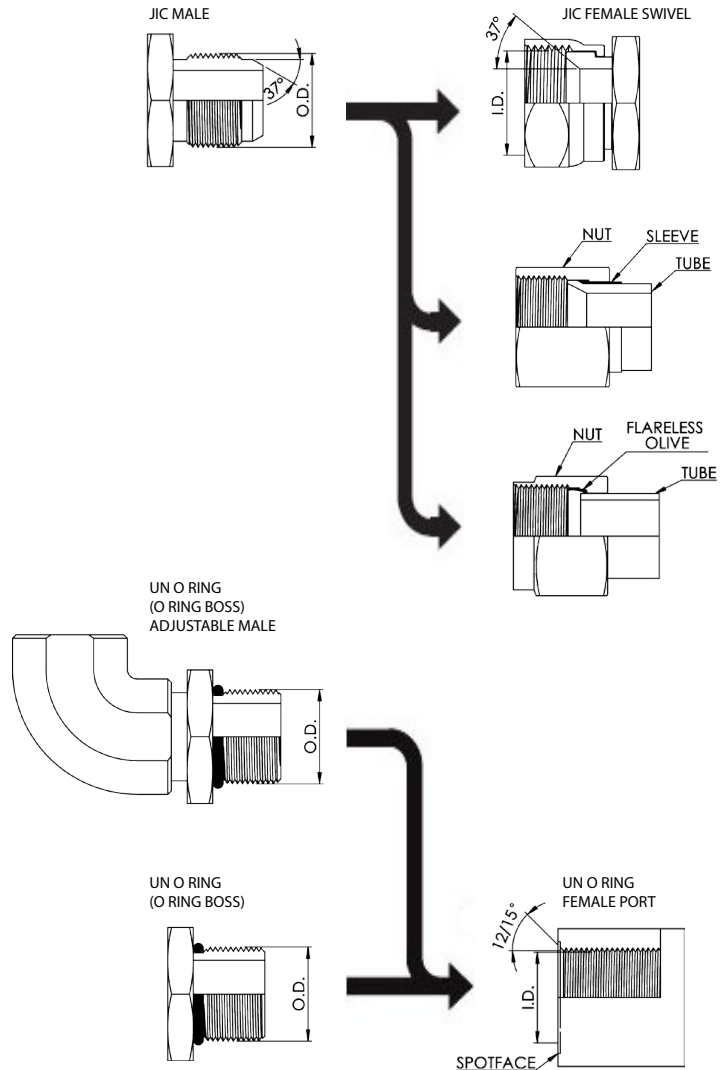

MALE THREAD O.D. & PITCH	DASH SIZE	MALE THREAD O.D.		FEMALE THREAD O.D.		TUBE SIZE
		mm	inch	mm	inch	
inch - TPI		mm	inch	mm	inch	inch
5/16 - 24 UNF	-05	7.9	0.31	6.9	0.27	1/8
3/8 - 24 UNF	-06	9.5	0.38	8.5	0.33	3/16
7/16 - 20 UNF	-07	11.1	0.44	9.9	0.39	1/4
1/2 - 20 UNF	-08	12.7	0.50	11.4	0.45	5/16
9/16 - 18 UNF	-09	14.3	0.56	13.0	0.51	3/8
3/4 - 16 UNF	-12	19.1	0.75	17.5	0.69	1/2
7/8 - 14 UNF	-14	22.2	0.88	20.3	0.80	5/8
1 1/16 - 12 UN	-17	27.0	1.06	24.9	0.98	3/4
1 3/16 - 12 UN	-19	30.2	1.19	28.2	1.11	7/8
1 5/16 - 12 UN	-21	33.3	1.31	31.2	1.23	1
1 5/8 - 12 UN	-26	41.3	1.63	39.1	1.54	1 1/4
1 7/8 - 12 UN	-30	47.6	1.88	45.5	1.79	1 1/2
2 1/2 - 12 UN	-40	63.5	2.50	61.5	2.42	2