

General Purpose Food Quality - PVC

Part No.: IH-PGP


Construction: Transparent PVC - abrasion and ozone resistant

Reinforcement: Steel helix wire

Size Available: 1/4" - 1"
(Larger sizes upon Request)

Temperature: -5°C +60°C

Safety Factor: 3:1

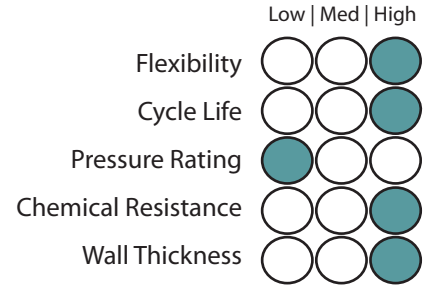

Construction

Use:

General purpose liquid food and alcoholic beverages suction and delivery - max 28% proof.



Standards:

FDA 2007/19/EC A+B+C
AS 2070

Specifications

| Part Number | Nominal Dia. | | Working Pressure | | Bend Radius | Weight |
|-------------|--------------|----------|------------------|-----|-------------|--------|
| | I.D (mm) | O.D (mm) | Bar | kPa | mm | Kg/M |
| IH-PGP-06 | 6 | 12 | 7 | 700 | 20 | 0.10 |
| IH-PGP-10 | 10 | 16 | 7 | 700 | 25 | 0.16 |
| IH-PGP-12 | 12 | 18 | 6 | 600 | 35 | 0.18 |
| IH-PGP-16 | 16 | 24 | 6 | 600 | 50 | 0.24 |
| IH-PGP-19 | 19 | 26 | 5 | 500 | 50 | 0.35 |
| IH-PGP-25 | 25 | 33 | 4 | 400 | 60 | 0.51 |
| IH-PGP-32 | 32 | 41 | 4 | 400 | 75 | 0.65 |
| IH-PGP-38 | 38 | 47 | 4 | 400 | 90 | 0.80 |
| IH-PGP-40 | 40 | 47 | 4 | 400 | 95 | 1.10 |
| IH-PGP-45 | 45 | 58 | 3 | 300 | 110 | 1.20 |
| IH-PGP-50 | 50 | 64 | 3 | 300 | 125 | 1.80 |
| IH-PGP-65 | 65 | 79 | 3 | 300 | 190 | 2.50 |
| IH-PGP-75 | 75 | 92 | 2 | 200 | 200 | 3.20 |
| IH-PGP-100 | 100 | 114 | 2 | 200 | 300 | 5.40 |
| IH-PGP-125 | 125 | 143 | 2 | 200 | 350 | 5.40 |
| IH-PGP-150 | 150 | 169 | 2 | 200 | 450 | 7.20 |

Applications

