

Rubber Hose - Chemical

FRAS Suction

Part No.: IH-RFS

Colour: Black


Tube: FRAS black smooth synthetic rubber, oil mist resistant

Cover: FRAS black smooth synthetic rubber, abrasion and weather resistant

Reinforcement: Plies of high strength synthetic cord incorporating a steel wire helix.

Size Available: 25mm - 102mm

Temperature: -35°C +70°C

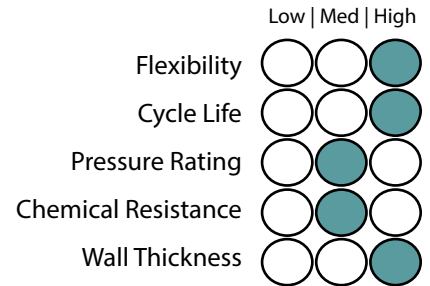

Construction

Use:

Built to AS2660 Class B. This heavy-duty, fire-resistant, anti-static suction hose is ideally suited for use in high fire risk industries.



Specifications

Part Number	Nominal Dia.		Working Pressure		Weight
	I.D (mm)	O.D (mm)	Bar	kPa	Kg/M
IH-RFS-25	25	36	10	1000	-
IH-RFS-51	51	65	10	1000	2.10
IH-RFS-76	76	91	10	1000	3.27
IH-RFS-102	102	118	10	1000	5.18

1 2 3 4 5 6 7 8 9 10

RUBBER & COMPOSITE HOSE

Applications

