

## Rubber Hose - Acetylene - Welding

### WELRED 20 ISO3821 L/L

**Part No.:** IH-WELDB-25

**Colour:** Red

**Tube:** Black, smooth, SBR rubber compound

**Cover:** Red, smooth, SBR/EPDM rubber compound, abrasion and weather resistant

**Reinforcement:** High strength synthetic plies

**Size Available:** TBC

**Temperature:** -25°C +80°C

Low | Med | High

Flexibility

Cycle Life

Pressure Rating

Chemical Resistance

Wall Thickness


### Construction

**Use:**

Delivery hose, acetylene line in welding equipments

**Standards**

ISO 3821

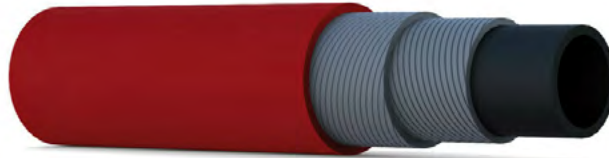

### Specifications

Part Number	Size	Internal Diameter	Outside Diameter	Max. Working Pressure		Min. Burst Pressure	
	inch	mm	mm	bar	PSI	bar	PSI
IH-WELDR-25-06	1/4	6	13	20	300	60	900
IH-WELDR-25-08	5/16	8	15	20	300	60	900
IH-WELDR-25-09	23/64	9	16	20	300	60	900
IH-WELDR-25-10	3/8	10	17	20	300	60	900
IH-WELDR-25-12	1/2	13	23	20	300	60	900
IH-WELDR-25-15	5/8	16	26	20	300	60	900
IH-WELDR-25-20	3/4	19	30	20	300	60	900
IH-WELDR-25-25	1	25	37	20	300	60	900

### Applications

