

Rubber Hose - Hydraulic

SAE 100 R13/EN856

Part No.: IH-RR13

Colour: Black

Tube: Oil resistant synthetic rubber.

Cover: Synthetic rubber - abrasion, ozone and weather resistant.

Reinforcement: 4 or 6 high tensile steel wire spirals.

Size Available: 3/8" - 2"


Temperature: -40°C +100°C

	Low Med High
Flexibility	<input type="radio"/> <input type="radio"/> <input checked="" type="radio"/>
Cycle Life	<input type="radio"/> <input type="radio"/> <input checked="" type="radio"/>
Pressure Rating	<input type="radio"/> <input type="radio"/> <input checked="" type="radio"/>
Chemical Resistance	<input type="radio"/> <input checked="" type="radio"/> <input type="radio"/>
Wall Thickness	<input type="radio"/> <input type="radio"/> <input checked="" type="radio"/>

Construction

Use:

Extremely high pressure hydraulics.

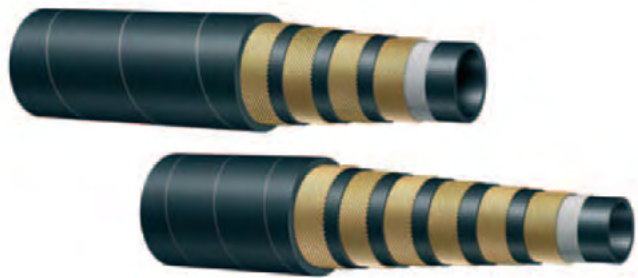

Standards:

EN 856

Specifications

Part Number	Size	Nominal Dia.		Braid Layers	Max. Working Pressure		Min. Burst Pressure		Bend Radius
	inch	I.D (mm)	O.D (mm)	No.	Bar	kPa	Bar	kPa	mm
IH-RR13-06	3/8"	9.5	22.4	4	690	69000	2760	276000	152
IH-RR13-08	1/2"	12.7	25.5	4	517	51700	2070	207000	200
IH-RR13-12	3/4"	19	31.9	4	345	34500	1380	138000	241
IH-RR13-16	1"	25.4	38.5	4	345	34500	1380	138000	305
IH-RR13-20	1 1/4"	31.8	49.6	6	345	34500	1380	138000	419
IH-RR13-24	1 1/2"	38.1	57.1	6	345	34500	1380	138000	508
IH-RR13-32	2"	50.8	70.9	6	345	34500	1380	138000	635

Applications

