

Rubber Hose - Acetylene - Welding

WELRED 20 ISO3821 L/L

Part No.: IH-WELDB-25

Colour: Red

Tube: Black, smooth, SBR rubber compound

Cover: Red, smooth, SBR/EPDM rubber compound, abrasion and weather resistant

Reinforcement: High strength synthetic plies

Size Available: TBC

Temperature: -25°C +80°C

	Low	Med	High
Flexibility			
Cycle Life			
Pressure Rating			
Chemical Resistance			
Wall Thickness			


Construction

Use:

Delivery hose, acetylene line in welding equipments

Standards

ISO 3821

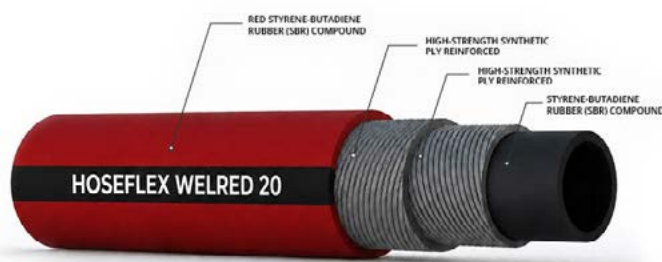

Specifications

Part Number	Size	Internal Diameter	Outside Diameter	Max. Working Pressure		Min. Burst Pressure	
	inch	mm	mm	bar	PSI	bar	PSI
IH-WELDR-25-06	1/4	6	13	20	300	60	900
IH-WELDR-25-08	5/16	8	15	20	300	60	900
IH-WELDR-25-09	23/64	9	16	20	300	60	900
IH-WELDR-25-10	3/8	10	17	20	300	60	900
IH-WELDR-25-12	1/2	13	23	20	300	60	900
IH-WELDR-25-15	5/8	16	26	20	300	60	900
IH-WELDR-25-20	3/4	19	30	20	300	60	900
IH-WELDR-25-25	1	25	37	20	300	60	900

Applications

