

PVC HEAT SHRINK

Part No.: HS

Material: Chemically cross-linked, thermally stabilised flame retardant polyolefin

Colours: Black, Red, White, Blue, Green, Yellow & Clear


Size Available: 6.4mm - 125mm (2:1 Shrink Ratio)

Temperature: -75°C +135°C

Construction

Use:

The tubing can easily be shrunk with a heat gun or a heat tunnel. All tubings in this range are flame retardant except clear

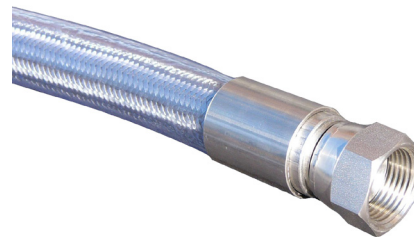

Specifications

Part Number	Nominal Dia.	
	I.D (mm)	Wall Thickness (mm)
HS-7-#	7.0	0.56
HS-10-#	9.5	0.62
HS-13-#	12.7	0.62
HS-20-#	19.1	0.68
HS-25-#	25.4	0.87
HS-38-#	38.1	1.00
HS-50-#	50.8	1.10
HS-76-#	76.2	1.20
HS-102-#	102.0	1.35
HS-125-#	125.0	1.40

Table Key

Colour #

BK = Black | R = Red | W = White | B = Blue | G = Green | Y = Yellow | C = Clear

Applications

