

Tuff-Red

Part No.: TUFFRED

Colour: Clear With Red Spiral

Construction: Translucent Clear Polyurethane

Reinforcement: Red Poly coated Sprig Wire Helix

Size Available: 2" - 18"

(Larger sizes upon Request)

Temperature: -30°C +120°C

Low | Med | High

Flexibility



Cycle Life



Pressure Rating



Chemical Resistance




Wall Thickness



Construction

Use:

Manufactured with an Ester based Polyurethane compound is an excellent alternate to abrasaflex with more attributes including dry-food grade, anti-static and will suit many dry food applications including transferring flour, sugar and other dry food powders

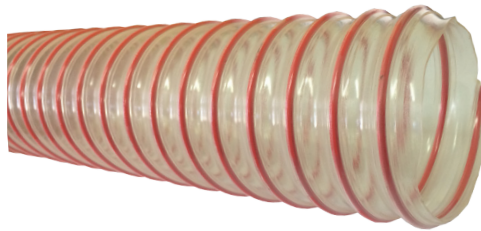

Specifications

Part Number	Nominal Dia.		Min. Bend Radius	Coil Length
	Inches	I.D (mm)	mm	m
TUFFRED-51	2"	51	102	10
TUFFRED-57	2 1/4"	57	114	10
TUFFRED-63	2 1/2"	63	126	10
TUFFRED-76	3"	76	152	10
TUFFRED-89	3 1/2"	89	178	10
TUFFRED-102	4"	102	204	10
TUFFRED-114	4 1/2"	114	228	10
TUFFRED-127	5"	127	254	10
TUFFRED-152	6"	152	304	10
TUFFRED-178	7"	178	356	10
TUFFRED-203	8"	203	406	10
TUFFRED-229	9"	229	458	10
TUFFRED-254	10"	254	508	10
TUFFRED-305	12"	305	610	10
TUFFRED-356	14"	356	712	5
TUFFRED-406	16"	406	812	5
TUFFRED-457	18"	457	914	5

Applications

