


### Tuflex

**Part No.:** TFD  
**Colour:** Dark Grey  
**Construction:** Neoprene Rubber  
**Reinforcement:** Wire Helix  
**Size Available:** 2" - 14"  
(Larger sizes upon Request)  
**Temperature:** -30°C +120°C

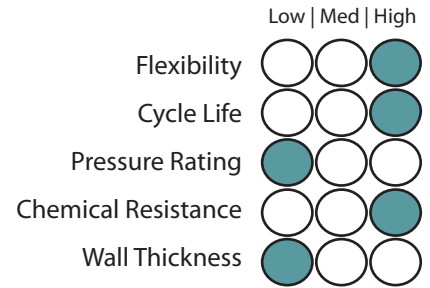

### Construction

**Use:**  
 Tuflex is constructed of calico material with neoprene rubber coating and is recommended where service conditions require a lightweight ducting able to withstand temperatures up to 120°C



### Specifications

Part Number	Nominal Dia.		Min. Bend Radius	Coil Length
	Inches	I.D (mm)	mm	m
TFD-51	2"	51	102	10
TFD-57	2 1/4"	57	114	10
TFD-63	2 1/2"	63	126	10
TFD-76	3"	76	152	10
TFD-83	3 1/4"	83	166	10
TFD-89	3 1/2"	89	178	10
TFD-102	4"	102	204	10
TFD-114	4 1/2"	114	254	10
TFD-127	5"	127	304	10
TFD-152	6"	152	356	10
TFD-178	7"	178	406	10
TFD-203	8"	203	458	10
TFD-229	9"	229	508	10
TFD-254	10"	254	560	10
TFD-280	11"	280	610	10
TFD-305	12"	305	712	5
TFD-356	14"	356	762	5

### Applications

