


# RUBBER & COMPOSITE HOSE

## Rubber Hose - Mining

### Muff Coupling Hoseflex® Mining Hose

**Colour:** Black  
**Tube:** NR/BR blend Super Abrasion Resistant Rubber  
**Cover:** Abrasion, UV and Ozone resistant rubber  
**Reinforcement:** Spiral Synthetic fabric and wire helix  
**Size Available:** DN50 to DN350  
**Temperature:** -30°C / + 70°C

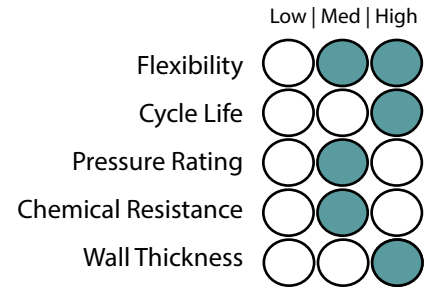

### Construction

**Use:**  
 Suitable for suction and discharge duty. Used in the transfer of slurry and water transfer, dewatering and tailings pipelines.

Lengths DN 50-100: Can be made up to 40 meters  
 Lengths DN 125-150: Can be made up to 20 meters  
 Lengths DN 250-350: Can be made up to 12 meters



### Specifications

Hose Size			Standard Liner Thickness		Vacuum Rating	Standard Working Pressure		Min Bend Radius		
DN	in	mm	mm	in	%	kPa	PSI	M	FT	X Dia
50	2	50.8	6	1/4	100	700	100	0.30	0.96	6
80	3	76.2	6	1/4	100	700	100	0.61	1.91	8
100	4	101.6	6	1/4	100	700	100	0.81	2.55	8
125	5	127	6	1/4	100	700	100	1.02	3.19	8
150	6	152.4	6	1/4	100	700	100	1.22	3.83	8
200	8	203.2	6	1/4	100	700	100	1.63	5.1	8
250	10	254	9	1/3	100	700	100	2.54	7.98	10
300	12	304.8	9	1/3	100	700	100	3.66	11.48	12
350	14	355.6	12	1/2	100	700	100	4.98	15.63	14

### Applications



1 2 3 4 5 6 7 8 9 10

RUBBER & COMPOSITE HOSE