

Rubber Hose - Offshore

Mud Bunkering Suction/Delivery Hose

Colour: Black

Tube: Black, smooth, NBR/PVC rubber compound

Cover: Black, smooth cloth impression, CR rubber compound, resistant to oil, grease, sea water, ozone and flame retardant

Reinforcement: High strength synthetic plies, with steel wire spirals and crossing copper wires for hose grounding

Size Available: 3" - 10"

Temperature: -40°C +100°C

Low | Med | High

Flexibility ☐ ☒ ☐

Cycle Life ☐ ☐ ☒

Pressure Rating ☐ ☒ ☐

Chemical Resistance ☐ ☒ ☐

Wall Thickness ☐ ☐ ☒


Construction

Use:

Suction and delivery hose, for drilling oil rig hose services, for petroleum muds and crude oil

Standards:

BS1435: 1987 S15/UNI EN 1765:99 S15

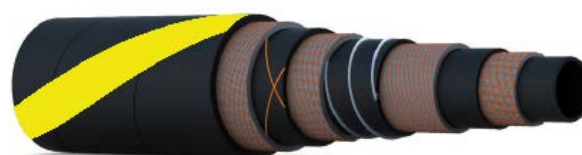

Specifications

Part Number	Size	Internal Diameter	Outside Diameter	Min. Bend Radius	Max. Working Pressure		Min. Burst Pressure		Vacuum
	inch	mm	mm	mm	bar	PSI	bar	PSI	Bar
IH-BUNKER-MUD-HW20-80	3	76	96	350	20	300	80	1200	0.9
IH-BUNKER-MUD-HW20-100	4	102	123	480	20	300	80	1200	0.9
IH-BUNKER-MUD-HW20-125	5	127	150	850	20	300	80	1200	0.9
IH-BUNKER-MUD-HW20-150	6	152	180	1000	20	300	80	1200	0.9
IH-BUNKER-MUD-HW20-200	8	203	237	1420	20	300	60	900	0.5
IH-BUNKER-MUD-HW20-250	10	254	290	1780	20	300	60	900	0.5

Applications

