


Composite Hose - Vapour Recovery

Composite Hose - Code 400 Vapour

Part No.: CH-400
Colour: Standard Black / Yellow Stripe
Inner Wire: Galvanised Steel
Reinforcement: Polypropylene Fabric and Films
Outer Wire: Galvanised Steel
Crimping: Swagged or Wire Whipped
Size Available: 4"
(Larger sizes upon Request)
Temperature: -20°C +80°C


Type: 1
Grade: 3
Electrical kind: 1

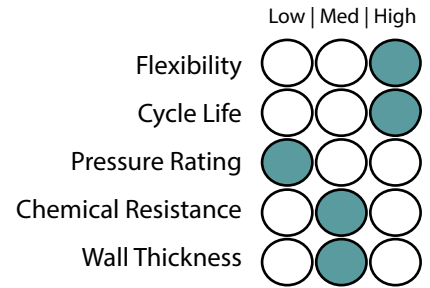

Construction

Use:

Built for vapour return of hydrocarbon products in marine, road and rail tanker operations. Suitable for the collection or transfer of hydrocarbon vapors within the oil industry. Vapour hoses are robust, but light weight and extremely flexible.

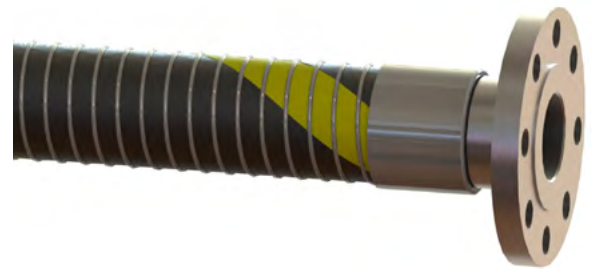

Applicable Standards

AS2683, BSEN13765: Type 1

Specifications

Part Number	Nominal Dia.			Max. Working Pressure		Max. Burst Pressure		Min. Bend Radius	Weight Per Mtr
	Inches	I.D (mm)	O.D (mm)	kPa	psi	kPa	psi	mm	kg.
CH-400-100	4'	102	112	400	58	1600	232	200	4.1

Safety Factor: 4:1 Standard Duty. (Burst Pressure: Working Pressure)

Applications



10
9
8
7
6
5
4
3
2
1

RUBBER & COMPOSITE HOSE