

Rubber Hose - Hygienic Food Grade

Milk Tanker - Hard Wall Crush Resistant

Part No.: IH-RMTC

Tube: White NR - abrasion resistant

Reinforcement: High textile cords with antistatic wire

Cover: Black conductive SBR/NR - abrasion and ozone resistant

Size Available: 3" - 4 5/16" (Larger sizes upon Request)

Temperature: -30°C +80°C

Safety Factor: 3:1

	Low	Med	High
Flexibility			
Cycle Life			
Pressure Rating			
Chemical Resistance			
Wall Thickness			


Construction

Use:

Bulk food and material delivery.
Specially designed for grain, flour and plastic pellets transfer.

Standards:

FDA

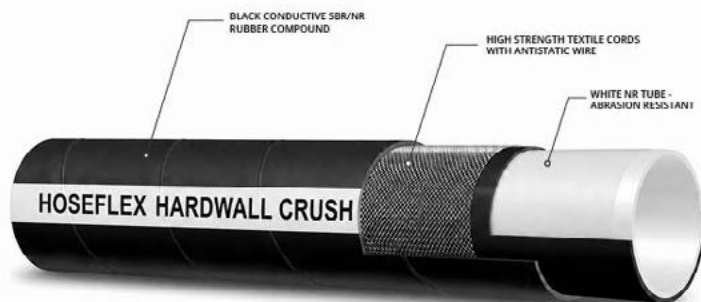

Specifications

Part Number	Nominal Dia.			Working Pressure		Min. Bend Radius	Vacuum	Weight Per Mtr
	Inches	I.D (mm)	O.D (mm)	kPa	psi	mm	%	kg.
IH-RMTC-80	3"	75	93	517	75	-	-	2.380
IH-RMTC-90	3 1/2"	90	102	517	75	-	-	2.130
IH-RMTC-100	4"	100	120	517	75	-	-	3.550
IH-RMTC-102	4"	102	118	517	75	-	-	2.760
IH-RMTC-100	4"	102	120	517	75	-	-	3.180
IH-RMTC-110	4 5/16"	110	122	517	75	-	-	2.550

Applications

